

Manuals+ — User Manuals Simplified.



Bambu Lab X1-Carbon 3D Printer User Guide

🕒 April 26, 2023





Contents [\[hide\]](#)

- 1 [Bambu Lab X1-Carbon 3D Printer User Guide](#)
 - 2 [Component Introduction](#)
 - 3 [Accessory Specification](#)
 - 4 [Tool Head Unlock](#)
 - 5 [Screen Installation](#)
 - 6 [Spool Holder Assembly](#)
 - 7 [Hot Bed Unlock](#)
 - 8 [Filament Loading](#)
 - 9 [Specification](#)
 - 10 [Read More About This Manual & Download PDF:](#)
 - 11 [Documents / Resources](#)
 - 12 [Related Posts](#)
-



Bambu Lab X1-Carbon 3D Printer User Guide

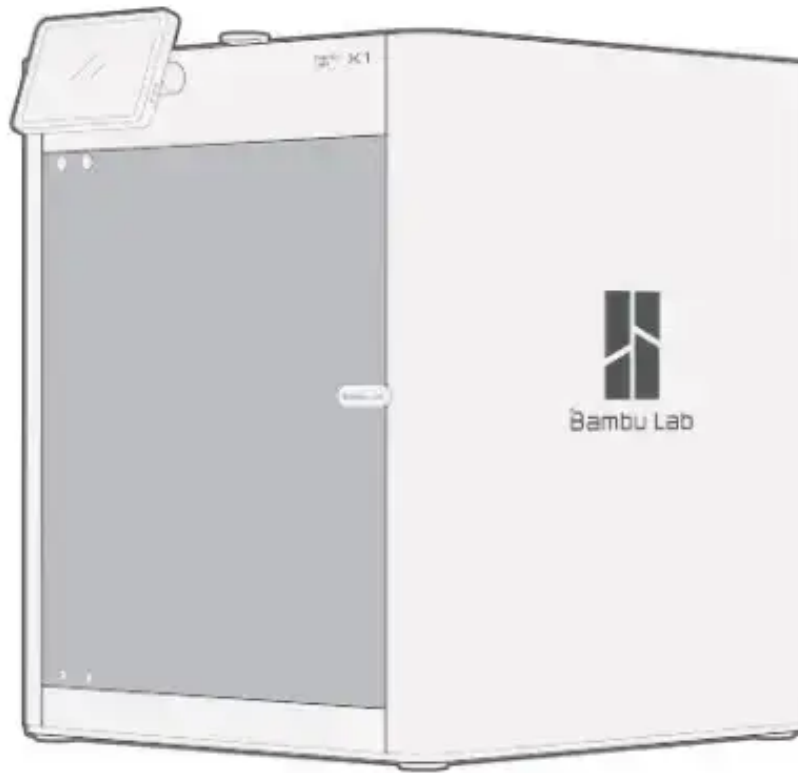

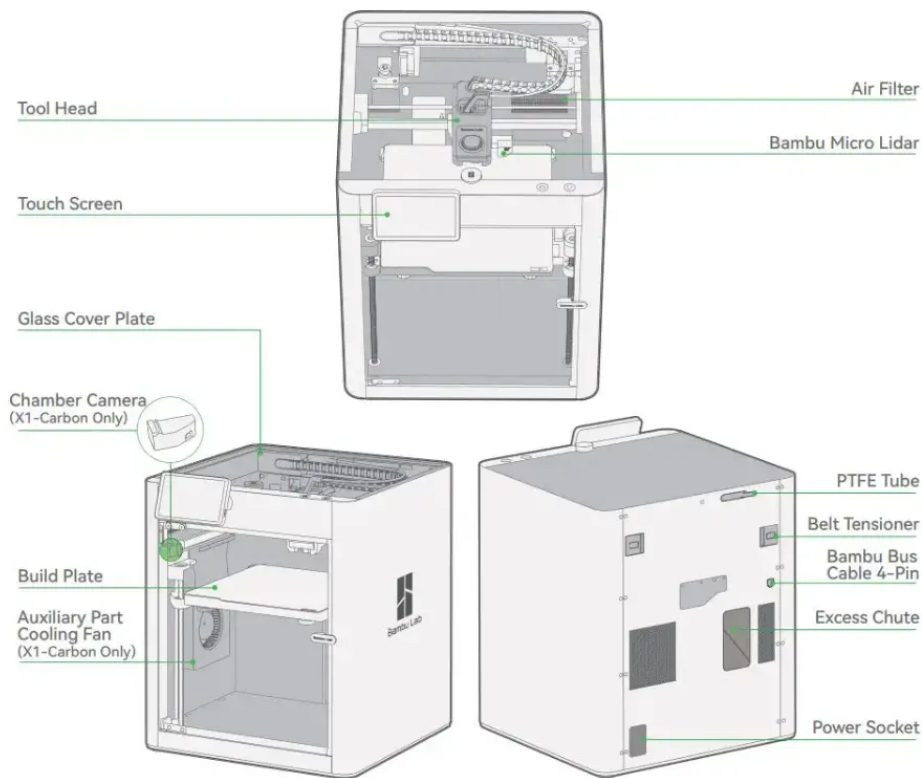


Accessory Specification



Touch Screen



Spool Holder



250g Filament



Spare Hot End



Nozzle Wiping Pad (x2)



Power Cord



Unclogging Pin Tool



PTFE Tube



Allen Key H1.5
Allen Key H2



Glue Stick for
Build Plate



Spare Sheet for




Flexible Build Plate




Bambu Scraper




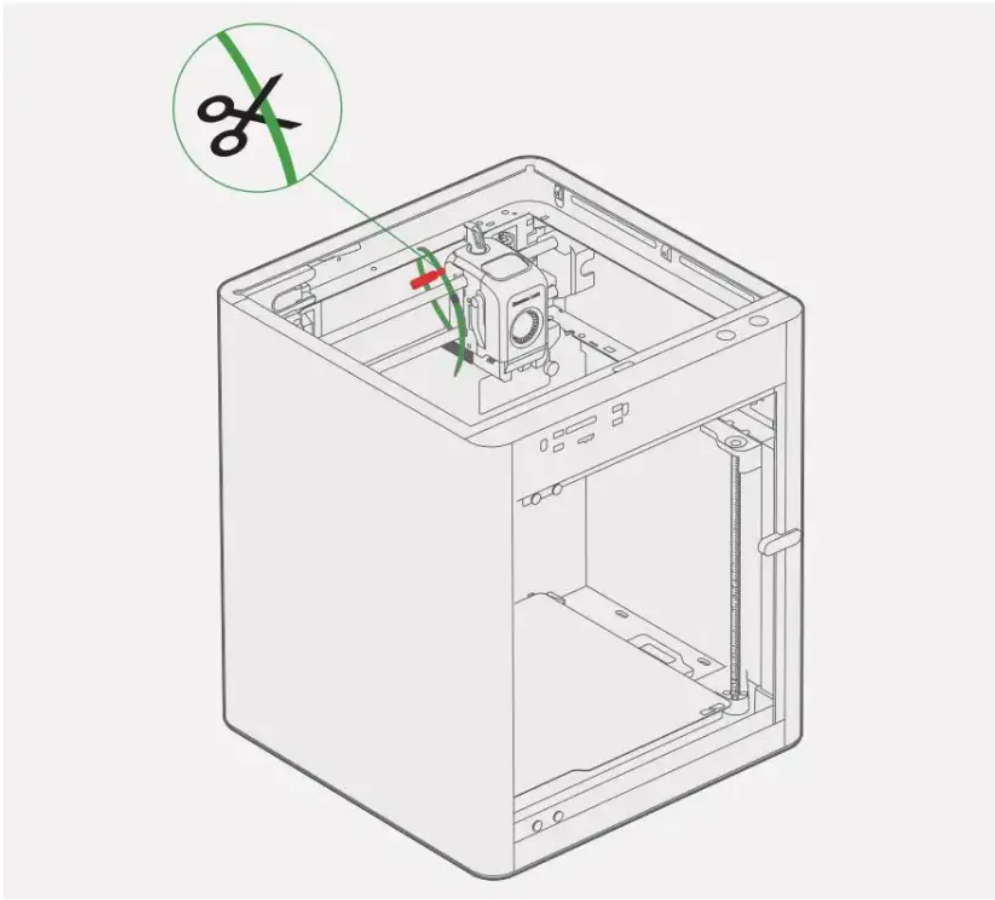


Screen Installation

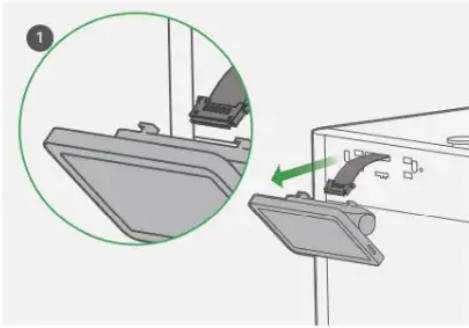

Pull the flat flex cable out about 50mm.

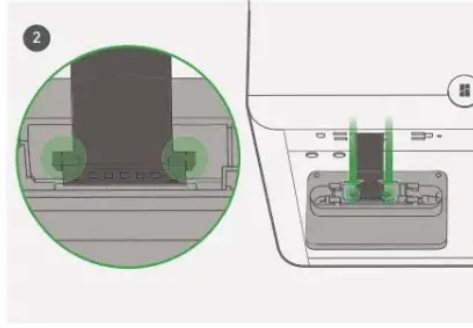


Insert the flat flex cable into the port by pressing the terminal as pictured.

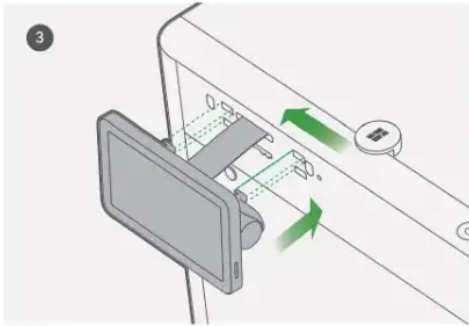


Insert the screen back to the slot on the printer, then lock it by pushing it to the left.

Spool Holder Assembly

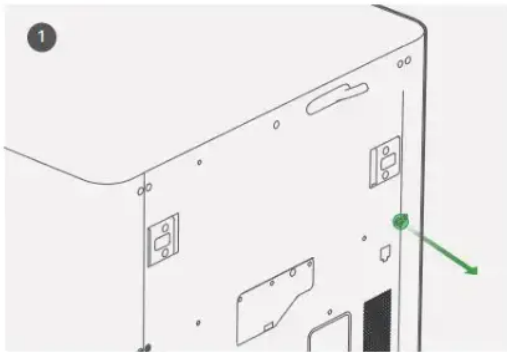


Remove the screw as pictured.

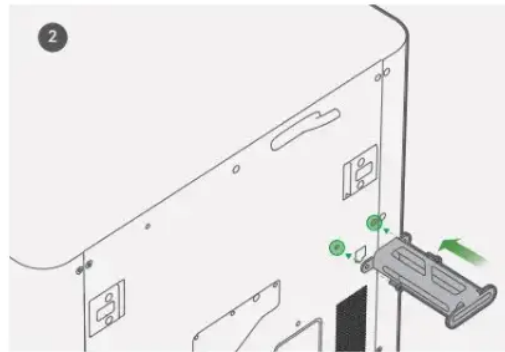


Screw the spool holder onto the hole sites as pictured.

Hot Bed Unlock

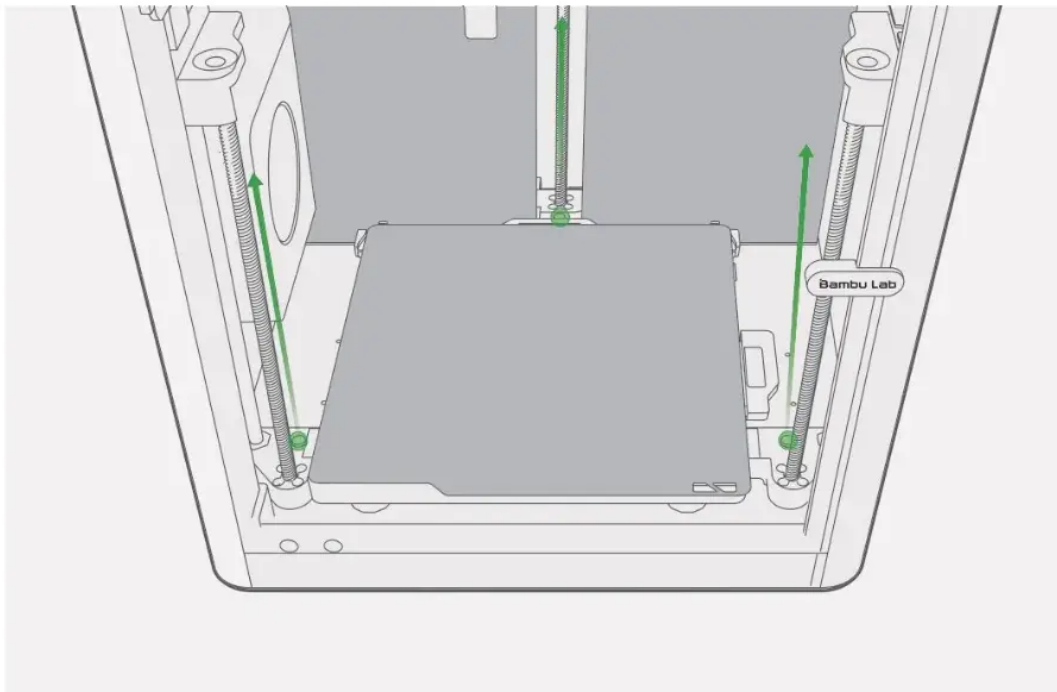

Remove the three screws to unlock the hot bed. Connect the printer to power. Follow the instructions on the screen to complete the initial calibration. Remove the protective foam



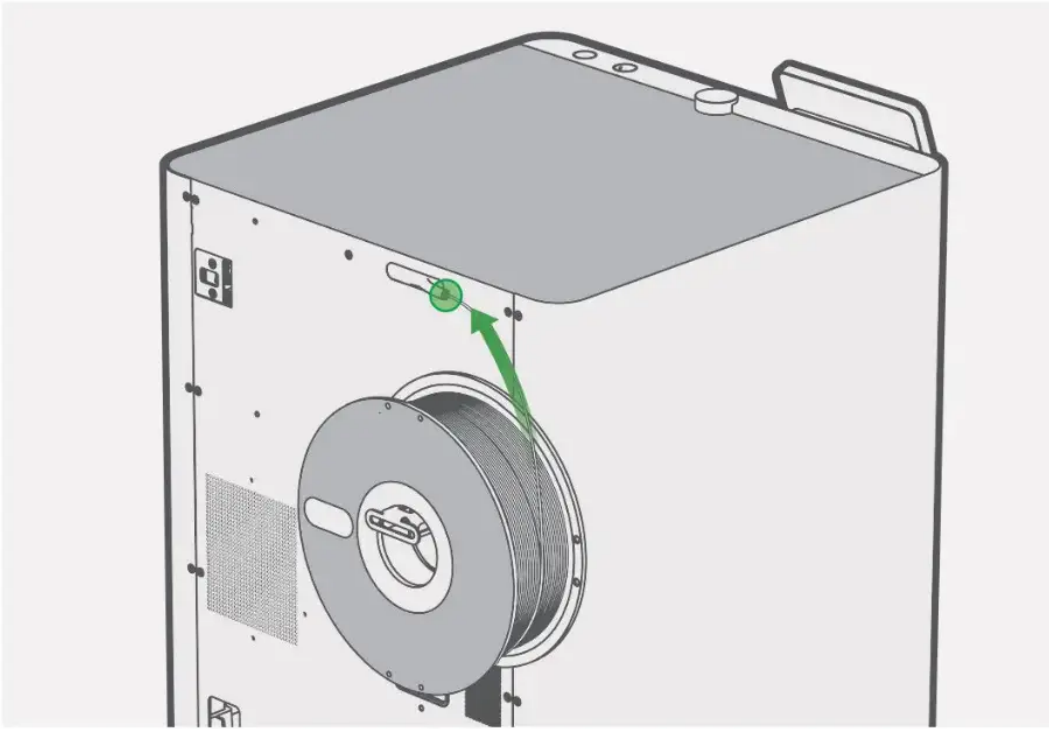

Insert the filament into the PTFE Tube. Keep pushing the filament until it can not move forward.

Specification

Technology		X1-Carbon	X1
		Fused Deposition Modeling	
Body	Build Volume(W*D*H)	256*256*256 mm	
	Chassis	Steel	
	Shell	Aluminum & Glass	Polycarbonate & Gl
Tool Head	Hot End	All-Metal	
	Extruder Gears	Hardened Steel	Steel
	Nozzle	Hardened Steel	Stainless Steel
	Max Hot End Temperature	300°C	
	Nozzle Diameter (Included)	0.4 mm	
	Nozzle Diameter (Optional)	0.2 mm, 0.6 mm, 0.8 mm	
	Filament Cutter	Yes	
	Filament Diameter	1.75 mm	
Hot bed	Build Plate	Flexible Steel Plate	
	Build Plate Surface(Included)	Bambu Cool Plate, Bambu Engineering Plate	
	Build Plate Surface (Optional)	Bambu Hot Plate	
	Max Build Plate Temperature	120°C	
Speed	Max Speed of Tool Head	500 mm/s	
	Max Acceleration of Tool Head	20 m/s ²	
	Max Hot End Flow	32 mm ³ /s @ABS	
Cooling	Part Cooling Fan	Closed Loop Control	
	Hot End Fan	Closed Loop Control	
	Control Board Fan	Closed Loop Control	
	Chamber Temperature Regulator Fan	Closed Loop Control	
	Auxiliary Part Cooling Fan	Closed Loop Control	Optional
	Air Filter	Activated Carbon Filter	Optional
Supported Filament	PLA, PETG, TPU,ABS,ASA,PVA,PET	Yes	
	PA, PC	Ideal	Capable
	Carbon/Glass Fiber Reinforced Polymer	Ideal	Not Recommended
Sensors	Bambu Micro Lidar	Yes	
	Chamber Monitoring Camera	1920*1080 Included	Optional
	Door Sensor	Yes	
	Filament Run Out Sensor	Yes	
	Filament Odometry	Optional with AMS	
	Power Loss Recover	Yes	
Physical Dimensions	Dimensions	389*389*457mm	
	Net Weight	14.13kg	13.18kg
Electrical Requirements	Voltage	100-240 VAC, 50/60 Hz	
	Max Power	1000W@220V, 350W@110V	
Electronics	Display	5-Inch 1280*720 Touch Screen	
	Connectivity	Wi-Fi,Bambu Bus	
	Storage	4GB EMMC and Micro SD Card Reader	
	Control Interface	Touch Screen, APP, PC Application	
	Motion Controller	Dual-Core Cortex M4	
	Application Processor	Quad ARM A7 1.2 GHz	
	Neural-Network Processing Unit	2 Tops	
	Slicer	Bambu Studio, Cura, Superslicer	

	Parameter	Value
Laser	Wavelength	405nm, 908nm
	Transmitter Power	≤ 5mW
	Maximum Output of Laser Radiation	<0.39mW

If you run into any issues during the guided setup, we are here to help. Customersupport@bambulab.com

Disclaimer and Warning

Thanks for purchasing a Bambu Lab product. The information in this document affects your safety and your legal rights and responsibilities. Read this entire document carefully to ensure proper configuration before use. Failure to read and follow instructions and warnings in this document may result in serious injury to yourself or others, damage to your Bambu Lab product, or damage to other objects in the vicinity. This document and other collateral documents are subject to change at the sole discretion of Bambu Lab. By using this product, you hereby signify that you have read this disclaimer and warning carefully and that you understand and agree you are solely responsible for your own conduct while using this product, and for any consequences thereof. You agree to use this product only for purposes that are proper and in accordance with all applicable laws, rules and regulations, and all terms, precautions,



responsibility incurred directly or indirectly from the use of the product. The user shall observe safe and lawful practices including, but not limited to, those set forth in this document. Bambu Lab is a trademark of Shenzhen Tuohy Technology Co., Ltd. and its affiliated companies. Names of products, brands, etc., appearing in this manual are trademarks or registered trademarks of their respective owner companies.

Before You Start

The following documents have been produced to help you safely operate and make full use of your

Bambu Lab X1 Series 3D Printer

Bambu Lab X1 Series 3D Printer Disclaimer and Safety Guidelines

Bambu Lab X1 Series 3D Printer Quick Start Guide

Check that you have all the included parts. Please review the entire Quick Start Guide before operating the printer.

Read the Disclaimer and Warning above to understand your legal rights and responsibilities. If you have any questions or problems during the installation, maintenance, or use of this product, please contact a Bambu Lab authorized dealer.

Safety Guidelines

1. The product must be disconnected from the power supply before carrying out any installation or maintenance work

2. Installation and maintenance must be carried out by a skilled worker in compliance with the manufacturer's instructions and local safety regulations

3. Do not use multiple plug adapters or extension leads



4. Do not touch the product with any wet part of the body and do not operate it while barefoot
5. Do not reach inside the appliance while it is in operation

6. Children using or near the printer must be accompanied and supervised by a responsible adult at all times.
7. This product is designed solely for indoor use. It should be kept in a dry environment
8. The recommended operating temperature for the appliance is between 0°C to 40°C (32°F to 104°F).
9. The recommended humidity level is under 85%
10. The product should be positioned on a clean, stable and flat workbench
11. The product should be kept in a well-ventilated location.



Compliance Information

FCC Compliance Notice

Supplier's Declaration of Conformity

Product name: X1/X1-Carbon

Model Number: PF001-NPF001-P

Responsibility Party: Shenzhen TuoZhu Technology Co.,Ltd. (Bambulab USA Inc)

Responsibility Party Address: 8000 Centre Park Drive. STE 330, Austin, TX, 78754

Website: www.bambulab.com

We, Shenzhen TuoZhu Technology Co.,Ltd. (Bambulab USA Inc} . being the responsible party, declares that the above mentioned model was tested to demonstrate compliance with all applicable FCC rules and regulations.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.



ISED Compliance Notice

This device contains license-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's license-exempt RSS(s). Operation is subject to the following two conditions

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

EU Compliance Statement

Hereby, Shenzhen TuoZhu Technology Co., Ltd. declares that the radio equipment type X1/X1-Carbon is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: www.bambulab.com/eum-compliance

GB Compliance Statement

Hereby, Shenzhen TuoZhu Technology Co .. Ltd. declares that the radio equipment type X1/X1-Carbon is in compliance with Radio Equipment Regulations 2017. The full text of the



Complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed.3.,as described in Laser Notice No.56,dated May8,2019



www.bambulab.com

Copyright© 2022 Bambu Lab All Rights Reserved.



Bambu Lab

Read More About This Manual & Download PDF:

Documents / Resources

A small thumbnail image showing the cover of the 'Bambu Lab X1-Carbon 3D Printer Quick Start' manual. The cover features the Bambu Lab logo and the title 'Quick Start'.	Bambu Lab X1-Carbon 3D Printer [Indf] User Guide
--	--



Bambu Lab X1-Carbon
3D Printer
Quick Start



[Bambu Lab X1 Carbon 3D Printer](#) [pdf] User Guide

X1 Carbon 3D Printer, X1 Carbon, X1 Carbon Printer, 3D Printer, Printer

Related Posts



[Bambu Lab X1 3D Printer User Guide](#)

Bambu Lab X1 3D Printer User Guide

Component Introduction Accessory

Specification Tool Head Unlock Screen

Installation Spool Holder...



[Easythread X1 3D Printer Installation Guide](#)

Easythread X1 3D Printer Install Manual This manual is written in accordance with

EasyThread X1 3D printer Printer...



[Bambu Lab SA001 AMS Color 3D Printer Instructions](#)

SA001 AMS Color 3D Printer Instructions Place





[Anet 3D Printer User Manual](#)

Anet 3D Printer User Manual - Download
[optimized] Anet 3D Printer User Manual -
Download

■ Bambu Lab ♦ 3D Printer, Bambu Lab, X1, X1-Carbon, X1-Carbon 3D Printer

Next Post—

[**Bambu Lab X1 Combo 3D Printer User Guide**](#)

—Previous Post

[**Bambu Lab P1P 3D Printer User Guide: Setup & Use Instructions**](#)

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *



Name

Email

Website

Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search



Search

@manualsplus YouTube

Manuals+,



report this ad

